

SWIFTLUX M3 MINI LED GIMBAL LIGHT



The Swiftlux M3 Mini LED Gimbal Light is a compact, low-profile recessed luminaire designed for precise, adjustable accent lighting. Featuring an integrated swivel gimbal, it allows targeted light placement in cabinetry, displays, and specialty interior applications

Key Features

- Mini recessed LED gimbal light with adjustable swivel trim
- 25° beam angle for focused accent illumination
- 2" gimbal trim with directional aiming capability
- Recessed installation only
- Spring clips for simple pressure-fit installation
- Durable aluminum housing
- Dimmable with compatible low-voltage dimming systems
- IC-rated construction

Applications

Cabinet lighting | Display and showcase lighting | Furniture integration | RV and yacht interiors

Installation


Recessed installation only Ø1-3/4 in (45 mm) cutout




Specifications

Voltage	12V DC
Wattage	3W
Lumen Output	235
Color Temp	3000K
Beam Angle	25°
# of LEDs	1 CREE LED
CRI	>85
IP Rating	20
Operating Temp	-20~+45°C (-4~113°F)
Lifespan	+50,000 hours
Lead Wire Length	12" (30cm)
Warranty	3 Years

Finishes Available

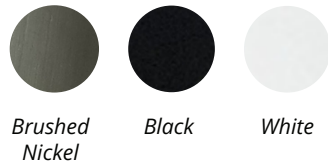

Dimensions

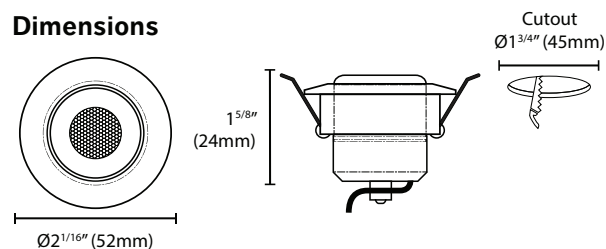

Ordering Codes

Product	Finish	Color Temp
LS - RD24	-	- 3K
	BN : Brushed Nickel	3K : 3000K
	BK : Black	
	WT : White	

Accessories & Controls

Image	Product	Code	Description
	Cabinet sensor touch switch	LS-TSW-5A	Sensor touch switch, 12-24V DC, 5A output current, 60W(12V) and 120W(24V) output power, Input and output wires are 20". For Cabinets, drawers, closets and more. Hide control behind material to turn anything into a switch
	Door Sensor Switch	LS-DSNS-SW	Door sensor switch, 12-24V DC, 5A output current, 60W(12V) and 120W(24V) output power, Input Wire Length is 60", sensor and output wires are 40". Activates when door opens (can use with one or two doors.) Recessed or surface mount.
	Mini RF Wall Mount Dimmer Remote	LS-WM-DIM-R	Single Color RF Wireless remote with surface, magnet, and recessed mount options. Battery operated, on/off & dimming, requires receiver (LS-WM-DIM-REC) to operate - Multiple remotes can pair to one receiver. Includes magnetic housing.
	Wall Mount Receiver	LS-WM-DIM-RCV	12-36V DC, 1x8A/Channel, output power 12V: 96W, 24V: 192W Surface mountable, hardwire, controls dimmer over 60' away NOTE: Up to 8 remotes can be paired with a single receiver. Unlimited receivers can be paired to 1 remote.
	Dimmer	LS-WD-WT	Dims 10-100% (fades up and down smoothly), 120V AC, 60Hz, Single Pole, 150W output power, Fits standard single gang junction box.

Power Supplies

Image	Code	Voltage	Output Power	Class II	Dimmable Specs
Non-Dimmable					
	LS-12V-15W-CV	12V	Max. 15W	✓	N/A
	LS-12V-30W-CV		Max. 30W	✓	N/A
	LS-12V-30W-O-CV		Max. 30W	✓	Non-Dim with Plug
	LS-12V-60W-O-CV		Max. 60W	✓	Non-Dim with Plug
	LS-12V-96W-O-CV		Max. 96W	✓ x	Non-Dim with Plug

Power Supplies

Dimmable					
Image	Code	Voltage	Output Power	Class II	Dimmable Specs
	LS-12V-24D-CV	12V	Max. 24W	✓	Triac Dimming. Hardwire
	LS-12V-48D-CV		Max. 48W	✓	
	LS-12V-60D-CV		Max. 60W	✓	
	LS-12V-30D-MLT-CV		Max. 30W	✓	5 in 1 dimming. Triac/Phase. 0-10V, 1-10V, Potentiometer, 10V PWM. Boxed Hardwire
	LS-12V-60D-MLT-CV		Max. 60W	✓	
	LS-12V-96D-MLT-CV		Max. 96W	✓	