

SYLVANIA Luminaires

UltraLED™ CCT Selectable Non-Cutoff Wall Pack

Application

The Wall Pack luminaires are environmentally preferable LED alternatives to traditional HID luminaires, offering up to 78% in energy savings. Ideal in place of traditional luminaires, or as new installations, the Wall Pack series is offered in several wattages/lumen packages for illuminating building exteriors, outdoor corridors, walkways, and stairwells.

Benefits and Features

- DLC Premium listing and wattage and lumen selectability provide high energy efficacy and optimize this product for utility rebates
- Integral Photocontrol included
- Optional Emergency Battery Back-up on selected wattages
- Traditional sizes allow seamless replacement of existing luminaires
- Up to 135 LPW
- 3000K, 4000K and 5000K color temperatures
- CRI >80
- Offered in 29, 40, 60, 80 or 120 watts
- Energy savings up to 78%

Electrical

- 120-277V_{AC}
- Power Factor >90%
- THD <20%
- 0-10V dimmable (if applicable)

Rated Life

- 150,000 hours (L₇₀@25°C)

Warranty

- 5-year

Ambient Operating Range

- -40°F to +122°F (-40°C to +50°C)
- 32°F to +122°F (0°C to +50°C) – Emergency Versions

Item #	_____
Type	_____
Project	_____
Notes	_____
Date	_____

29W



40/60/80W



120W



Wattage Comparison

Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings
70W HPS	91	29	68%
100W HPS	120	29	76%
100W MH	130	29	78%
70W HPS	91	40	56%
100W HPS	120	40	67%
100W MH	130	40	69%
150W HPS	170	60	65%
150W MH	188	60	68%
175W MH	210	60	71%
175W MH	210	80	62%
250W MH	290	80	72%
250W HPS	295	80	73%
320W MH	370	120	68%
400W HPS	460	120	74%
400W MH	450	120	73%

Certifications and Listings

- cULus
- FCC
- RoHS
- DLC Premium

Installation

- Luminaire mounts to exterior wall.



Ordering Guide

WALPAKN	5X	/	XXX	UNV	D	8	SC2	/	BZ	/	XX
Product Name	Generation/Size*		Wattage	Voltage	Dimming	CRI	Color Temp		Color/Finish		Options
WALPAKN = Non-Cutoff Wall Pack	5A, 5B, 5C		029 = 29 Watts 040 = 40 Watts 060 = 60 Watts 080 = 80 Watts 120 = 120 Watts	UNV = 120-277V	D = 0-10V dimming	8 = >80	SC2 = 3000K, 4000K or 5000K		BZ = Bronze		P = Photocontrol PE = Photocontrol + Emergency Battery Back-up

*5A = 29W only
5B = 40, 60 or 80W
5C = 120W only


Ordering Information

Item Number	Ordering Abbreviation	Wattage (W)	Input Voltage (V)	Dimming	CRI	Color Temperature (CCT)	Total Fixture Lumens	LPW	Color	DLC	Option Included
61838	WALPAKN5A/029UNVD8SC2BZ/P	29	120-277	0-10V	>80	3000, 4000 or 5000K	3700	135	Bronze	Premium	Photocontrol
61828	WALPAKN5B/040UNVD8SC2/BZ/P	40	120-277	0-10V	>80	3000, 4000 or 5000K	5400	135	Bronze	Premium	Photocontrol
61829	WALPAKN5B/060UNVD8SC2/BZ/P	60	120-277	0-10V	>80	3000, 4000 or 5000K	8100	135	Bronze	Premium	Photocontrol
61830	WALPAKN5B/080UNVD8SC2/BZ/P	80	120-277	0-10V	>80	3000, 4000 or 5000K	10,800	135	Bronze	Premium	Photocontrol
61840	WALPAKN5C/120UNVD8SC2BZ/P	120	120-277	0-10V	>80	3000, 4000 or 5000K	16,200	135	Bronze	Premium	Photocontrol
61831	WALPAKN5B/040UNVD8SC2BZ/PE	40	120-277	0-10V	>80	3000, 4000 or 5000K	5400	135	Bronze	Premium	Photocontrol + Emergency Battery Back-up
61832	WALPAKN5B/060UNVD8SC2BZ/PE	60	120-277	0-10V	>80	3000, 4000 or 5000K	8100	135	Bronze	Premium	Photocontrol + Emergency Battery Back-up


Physical Information

Lamp Description	Length (inches)	Width (inches)	Height (inches)
29W	10.7	8.3	7.7
40W	14.4	9.3	7.4
60W	14.4	9.3	7.4
80W	14.4	9.3	7.4
120W	17.9	9	9.4


5A

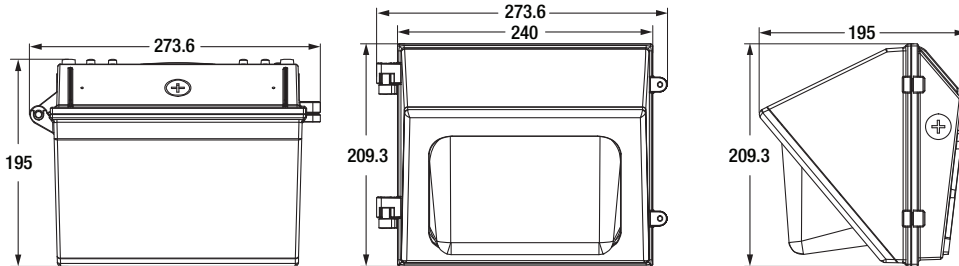

5B

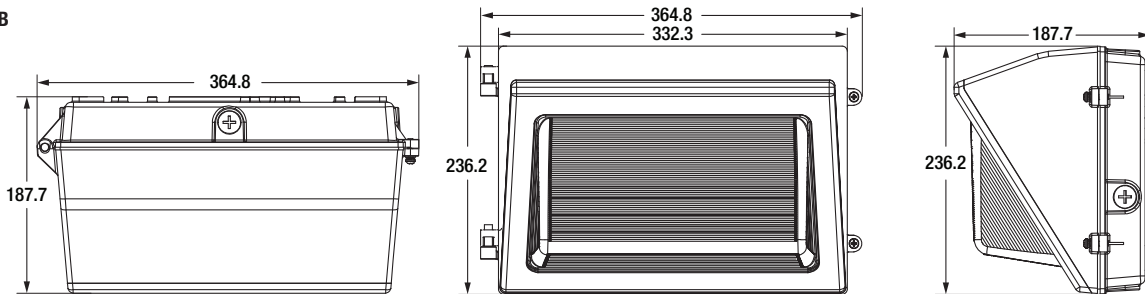

5C

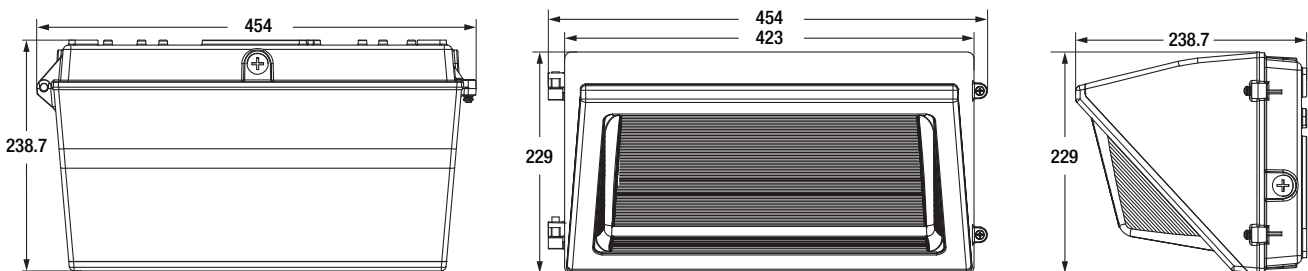

Dimensions in mm

LEDVANCE LLC
 200 Ballardvale Street
 Wilmington, MA 01887 USA
 Phone 1-800-LIGHTBULB (1-800-544-4828)
 www.sylvania.com

SYLVANIA and LEDVANCE are registered trademarks.
 All other trademarks are those of their respective owners.
 Licensee of product trademark SYLVANIA in general lighting.
 Specifications subject to change without notice.

[/sylvania](https://twitter.com/sylvania) [/sylvania](https://facebook.com/sylvania)

© 2020 LEDVANCE LLC

Name: _____
 Email: _____
 Phone: _____

