




Features

Input Power on AC (when charging)	6W
Output Power on Battery	1.5W
Input Voltage	120/347 VAC
Frequency	60 Hz
LED Type	SMD LED
Battery Type	Ni-Cd
Working Time	120 Minutes
Charging Time	15-24 Hours

Description

- Injection-molded thermoplastic ABS housing
- CSA 22.2 compliant
- 2-sided sign
- Wall, side and ceiling mountable
- Input Power on AC is 1W when fully charged
- Input Voltage: 120/347 VAC, 60Hz
- Super bright SMD LED strip
- Nickel Cadmium Battery 3.6V 1000mAh
- Test switch and charge indicator light
- Overcharge & Over-discharge protection
- Backup time: ≥120 minutes
- Conversion time: <0.2 second
- IP Class: IP20
- Insulation: II
- Operating Temperature: 0 °C ~ 40 °C / 32 °F ~104 °F

Technical Drawing

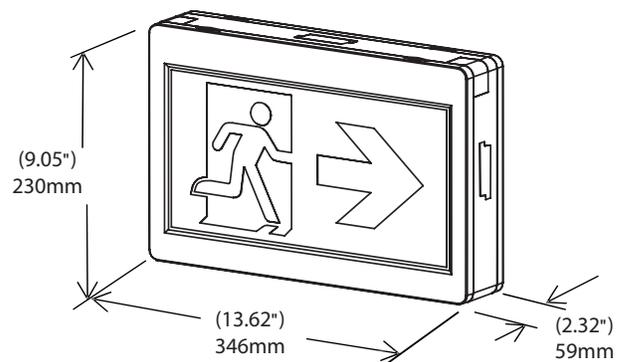

Included Pictograms



With Arrow 2 pcs



Without Arrow 1 pc



Ordering Information

Model	Description
ELRM-100	LED Running Man Sign, 6 per case



Canada
 25 Interchange Way Vaughan, ON L4K 5W3
 Telephone: (905) 660-4655 | Fax: (905) 660-4113

U.S.A.
 4575 Witmer Industrial Estates Niagara Falls, NY 14305
 Toll Free: (888) 660-4655 | Fax Toll Free: (888) 660-4113

www.mircom.com

This document is provided by Mircom Technologies Ltd., MGC Systems Corp., or their affiliates, subsidiaries and brands, for convenience or marketing only and does not describe products or services technically. For technical information refer to technical manuals. We do not make representations or warranties regarding this information, including as to completeness or accuracy. We may change these contents at any time and reserve all rights in the contents, including copyrights, trademarks and other intellectual property. All other trademarks and registered trademarks are properties of their respective owners.

CATALOG NUMBER **4133**

Rev. 2