

Premium Constant Voltage Spotless COB LED Strips

Model: FLEX CV 24V XX COB QL IPXX

XX = WW (30K), NW(40K), CW(50K), PW(60K)
IPXX = IP20 (non-waterproof), IP67 (waterproof)



Description

Spotless COB Flexstrip provides smooth, continuous illumination with no visible LED dots, making it ideal for clean, professional lighting applications. It can be cut to custom lengths and installed in aluminum channels for enhanced diffusion and mounting flexibility. Available in multiple colours and intensities, this dimmable COB strip is compatible with remotes, wall switches, and Wi-Fi controls, delivering precise lighting exactly where you need it.


Application

- Undercabinet
- Stairways
- Toe kicks
- Accents
- Wine rooms
- Vehicles
- Display cases
- And more

Specification

Power (w/m)	14.4W/M
Color	3000K/4000K/5000K/6000 K/RGBW
LED/M	528
Lumen Per Meter Lumen Per Watt	1100 - 1400 76 - 97
Roll Length	5M / 16.4ft
Dimming	Yes
PCB Width	8mm
Cutting	4.545cm
CRI	>90
Input	24V
Lifetime Hours	50,000
Warranty	5 Years - When installed with an Eco Lighting driver
Factory Wire Ends	2

Dimensions

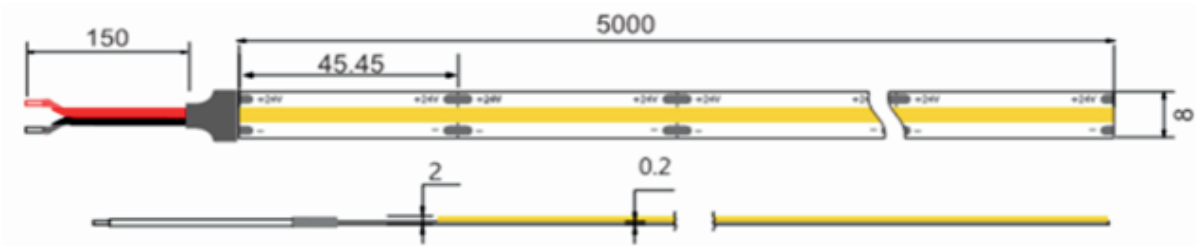




Connections



Ordering Guide

Colour Temperature	Waterproofing	Model Number	Lumens per Meter
3000K (WW)	IP20	FLEX CV 24V WW COB QL IP20	1100 - 1200
	IP67	FLEX CV 24V WW COB QL IP67	1100 - 1200
4000K (NW)	IP20	FLEX CV 24V NW COB QL IP20	1200 - 1300
	IP67	FLEX CV 24V NW COB QL IP67	1200 - 1300
5000K (CW)	IP20	FLEX CV 24V CW COB QL IP20	1300 - 1400
	IP67	FLEX CV 24V CW COB QL IP67	1300 - 1400
6500K (PW)	IP20	FLEX CV 24V PW COB QL IP20	1300 - 1400
	IP67	FLEX CV 24V PW COB QL IP67	1300 - 1400

Connectors (sold separately)

Picture	Description	Model Number
	Crimp Down Wire End 8mm (COB)	FLEX CONN QL 8MM CRIMP
	90 Degree Crimp Down Connector 8mm (COB)	FLEX CONN QL 8MM CRIMP TL8
	Snap On FM/FM Connector 8mm (COB)	FLEX CONN 8MM FM/FM 2WIRE SNAP