

LED FIXTURE

TL Series



LED Emergency Light TL-EM001

Twin head LED emergency light



2-year limited warranty

Operating temperature range -10 °C ~ +40 °C



Features & Benefits

Injection-molded thermoplastic housing

Input voltage 120/347V

Ni-cd battery backup for 1.5 hrs

2W x 2 SMD LED adjustable heads


Universal (wall, ceiling) mounting

Test switch and charge indicator light

UL-94V-0 flame rating, fire-retardant

IP20, damp location rated

Dimensional Drawing

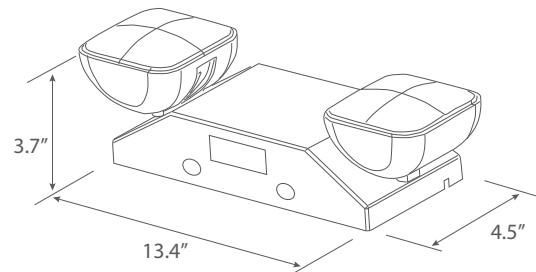

Ordering Information Example: TL-EM001

Family Name	Fixture Type	Model
TL (Turolight)	EM (Emergency light)	001 (Twin head LED emergency light, self powered)

Product Specification

Ordering Code	Model Number	Description	Wattage (W)	Input Voltage (V)	CCT (K)	Hour Rating	CRI	Lumens	Mounting	Remote Capable	Self Powered Battery	Damp Location	Dimensions L×W×H (inch)	Case QTY.
3461211	TL-EM001	Twin head LED emergency, Ni-cd battery backup for 1.5 hours	4W	120/347V	7000	50,000	82	181	Wall, ceiling	No	Yes (1.5hrs)	Yes	13.4"×4.5"×3.7"	12